

HDCH8P Modular Contactor

Standard: IEC 61095



Function

HDCH8P Modular Contactor provide:

- Automatic control on equipment in buildings
- Switch on or Switch off lighting or other equipments

Order Information



Pole	Current (A)	Contacts	Reference	
2P	16	2NO	HDCH8P16220	
		1NO 1NC	HDCH8P16211	
	20	2NO	HDCH8P20220	
		1NO 1NC	HDCH8P20211	
	25	2NO	HDCH8P25220	
		1NO 1NC	HDCH8P25211	
	32	2NO	2NC	HDCH8P32220
			1NO 1NC	HDCH8P32211
		40	2NO	HDCH8P40220
	2NC		HDCH8P40202	
	63	2NO	1NO 1NC	HDCH8P40211
			2NC	HDCH8P63220
1NO 1NC		HDCH8P63202		
4P	16	4NO	HDCH8P16440	
		4NC	HDCH8P16404	
		2NO 2NC	HDCH8P16422	
		3NO 1NC	HDCH8P16431	
	20	4NO	HDCH8P20440	
		4NC	HDCH8P20404	
		2NO 2NC	HDCH8P20422	
		3NO 1NC	HDCH8P20431	
	25	4NO	HDCH8P25440	
		4NC	HDCH8P25404	
		2NO 2NC	HDCH8P25422	
		3NO 1NC	HDCH8P25431	
	32	4NO	HDCH8P32440	
		4NC	HDCH8P32404	
		2NO 2NC	HDCH8P32422	
		3NO 1NC	HDCH8P32431	
	40	4NO	HDCH8P40440	
		4NC	HDCH8P40404	
		2NO 2NC	HDCH8P40422	
		3NO 1NC	HDCH8P40431	
	63	4NO	HDCH8P63440	
		4NC	HDCH8P63404	
		2NO 2NC	HDCH8P63422	
		3NO 1NC	HDCH8P63431	

Final Distribution

HDCH8P Modular Contactor

Standard: IEC 61095

CE

Technical information

Standard	IEC 61095	
Ambient Temperature	- 5°C~40°C	
Rated Voltage Ue	230V AC	
Rated Insulation Voltage Ui	500V AC	
Operation Time	≥30000 times	
Coil Voltage (Us)	220/230V AC	
Type	AC-7a	AC-7b
Rated Current (Ie)	20A/25A/32A/40A/63A	7A/8.5A/12A/15A/25A
Rated Power	4kW/5.4kW/6.5kW/ 8.4kW/13kW	1.2kW/1.5kW/1.9kW/ 2.4kW/3.8kW
Operation Frequency	1200times/h	30time/h
Marking & Breaking Capacity	1.5Ie	8Ie


HDCH8P Modular Contactor

Standard: IEC 61095




Overall Dimensions


HDCH8P-2P, 16-25A

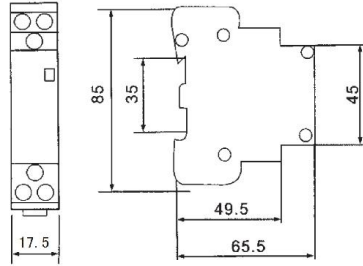


HDCH8P-2P, 32-63A

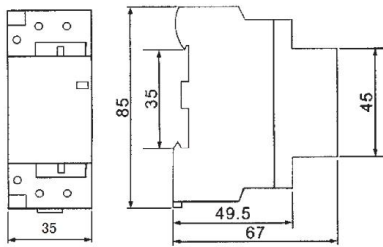

HDCH8P-4P, 16-25A

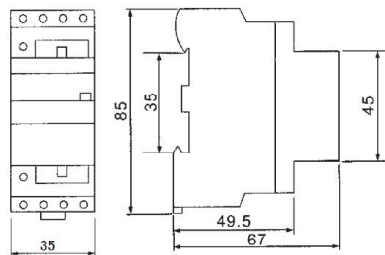

HDCH8P-4P, 32-63A

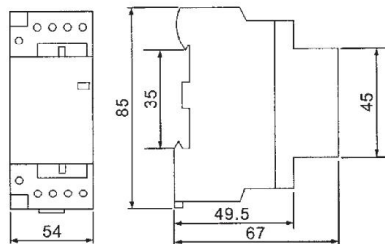

Final Distribution